

35 015 Universal Pressure Balance Rough-In Valve




Description

Handle Limit Stop
 Diaphragm Cartridge
 Check Valves
 Built-In By-Pass
 Service Stops
 Includes cap and plug for 3 port installation
 Universal connection is 1/2" male by copper sweat

Flow Rate

(top port) 5.5 gpm at 45 psi (21 L/min)
 (bottom port) 5.8 gpm at 45 psi (22 L/min)

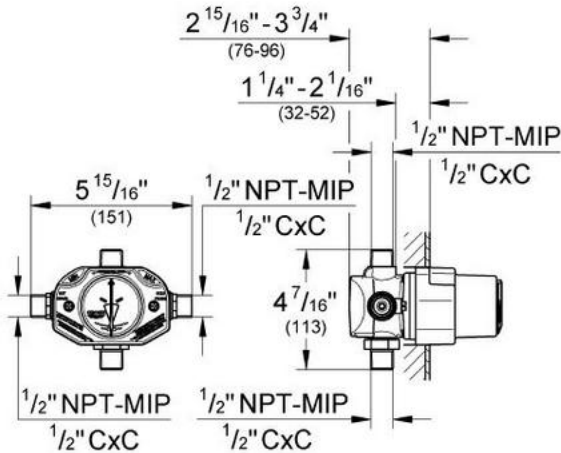

Code Compliance

ASME/ANSI A112.18.1M
 ASSE Standard 1016
 CSA Standard B125.1-05

Finish Options

35 015 000 Rough-In