

**MADERA™ RIGHT HEIGHT ELONGATED
FLUSH VALVE TOILET LESS EVERCLEAN®**

- Flush valve toilet
- Vitreous china
- Conventional glaze
- Low-consumption (6.0 Lpf/1.6 gpf)
- 10" or 12" roughing-in
- 16-1/2" to 17" rim height
- Elongated bowl
- Direct-fed siphon jet action
- Fully glazed 2-1/8" trapway
- 10" x 12" water surface area
- 1-1/2" top spud
- 2 bolt caps
- 100% factory flush tested

- 3043.102** Elongated bowl only, top spud
- 3043.001** Same as above, Universal Bowl
- 3248.001** Elongated Universal bowl only, top spud with slotted rim for bedpan holding (White Only)
- 3249.001** Elongated Universal bowl only, back spud (White Only)

Component Parts:

- 047007-0070A** Inlet spud (furnished with bowl)
- 481310-100** Bolt caps with retainers (furnished with bowl)

Nominal Dimensions:

For 3043.102:

765 x 381 x 438mm (30-1/8" x 15" x 17-1/4")

For Others:

718 x 356 x 419mm (28-1/4" x 14" x 16-1/2")

Recommended working pressure – between 25 psi at valve when flushing and 80 psi static

Fixture only, seat and flush valve by others

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:

- Color: White Bone
- Seat: 5901.100 American Standard Seat
- 5901.110 American Standard Seat with EverClean®
- Alternate Seat: 5905.100 Heavy Duty American Standard Seat
- 5905.110 Heavy Duty American Standard Seat with EverClean
- Flush Valve:
 - American Standard Selectronic™ #6065.161.002 DC Power (Top Spud)
 - American Standard Selectronic™ #6065.261.007 DC Power (Back Spud)
 - American Standard Selectronic™ #6067.261.007 AC Power (Back Spud)
 - American Standard Selectronic™ #6068.261.007 Multi AC Power (Back Spud)




SEE REVERSE FOR ADDITIONAL
ROUGHING-IN DIMENSIONS

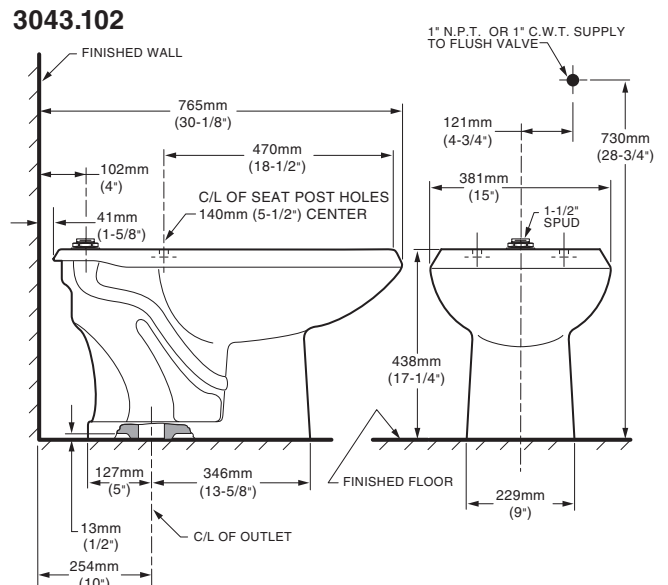

NOTES:

PRODUCT 3043.102 SHOWN.
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 254MM (10") FROM FINISHED WALL TO C/L OF OUTLET. TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON FLUSH VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGHING. FLUSH VALVE NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

 **MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES - CHECK LOCAL CODES.**

