

DW Series

MEMBER OF
MORRIS GROUP
INTERNATIONAL*



Dry Wall Access Doors

Doors are ideally suited for new installations or for remodeling in masonry, tile, wood or other wall and ceiling surfaces. Door features rounded safety corners.

Door and Frame are fabricated from 16 gage, galvanized steel with a white prime coat finish.

Frame is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fixing maximum clearance.

Concealed Pivoting Rod Hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge.

Latch is screwdriver operated.

Finish is a white prime coat suitable for painting.

Guide Specification

Provide Elmdor® DW Series, Dry Wall Access Doors (Specify model number and options.) Access door and frame shall be fabricated from 16 gage, galvanized steel with a white prime coat finish. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no miters or welds on the face. Latch shall be screwdriver operated. Finish shall be a white prime coat suitable for painting.



Member of U.S. Green
Building Council

DW

Revised: 08/31/18



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

- DW Dry Wall Access Door
(16 Gage Steel)



Suffix Options

- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter
(one per door)
- MAS Masonry Anchor Straps
- MLP Mortise Cylinder Lock (Prep)
- SS Stainless Steel Construction
(Type 304 No. 4 Satin Finish)
- TH 'T' Handle

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE			
(W X H)	WALL OPENING	LATCHES	WEIGHT
DW 6" x 6"	6-1/2" x 6-1/2"	1	3 lbs.
DW 8" x 8"	8-1/2" x 8-1/2"	1	3 lbs.
DW 8" x 12"	8-1/2" x 12-1/2"	1	4 lbs.
DW 10" x 10"	10-1/2" x 10-1/2"	1	4 lbs.
DW 12" x 12"	12-1/2" x 12-1/2"	1	5.5 lbs.
DW 12" x 16"	12-1/2" x 16-1/2"	1	6 lbs.
DW 12" x 18"	12-1/2" x 18-1/2"	2	6.5 lbs.
DW 12" x 24"	12-1/2" x 24-1/2"	3	9.5 lbs.
DW 14" x 14"	14-1/2" x 14-1/2"	1	6 lbs.
DW 14" x 20"	14-1/2" x 20-1/2"	3	8 lbs.
DW 14" x 24"	14-1/2" x 24-1/2"	3	15 lbs.
DW 15" x 15"	15-1/2" x 15-1/2"	1	6.5 lbs.
DW 16" x 16"	16-1/2" x 16-1/2"	1	7.5 lbs.
DW 16" x 20"	16-1/2" x 20-1/2"	3	8.5 lbs.
DW 16" x 24"	16-1/2" x 24-1/2"	3	10 lbs.
DW 18" x 18"	18-1/2" x 18-1/2"	3	9 lbs.
DW 18" x 24"	18-1/2" x 24-1/2"	5	12 lbs.
DW 18" x 36"	18-1/2" x 36-1/2"	6	16 lbs.
DW 20" x 20"	20-1/2" x 20-1/2"	3	11 lbs.
DW 20" x 24"	20-1/2" x 24-1/2"	5	13 lbs.
DW 20" x 30"	20-1/2" x 30-1/2"	5	15 lbs.
DW 22" x 22"	22-1/2" x 22-1/2"	3	12 lbs.
DW 22" x 30"	22-1/2" x 30-1/2"	5	16 lbs.
DW 22" x 36"	22-1/2" x 36-1/2"	6	22 lbs.
DW 24" x 24"	24-1/2" x 24-1/2"	3	15 lbs.
DW 24" x 30"	24-1/2" x 30-1/2"	5	17 lbs.
DW 24" x 36"	24-1/2" x 36-1/2"	6	20.5 lbs.
DW 24" x 48"	24-1/2" x 48-1/2"	7	28 lbs.
DW 30" x 30"	30-1/2" x 30-1/2"	7	21.5 lbs.
DW 30" X 36"	30-1/2" X 36-1/2"	8	29 lbs.
DW 32" x 32"	32-1/2" x 32-1/2"	7	23 lbs.
DW 36" x 36"	36-1/2" x 36-1/2"	8	31.5 lbs.
DW 36" x 48"	36-1/2" x 48-1/2"	9	42 lbs.
DW 48" x 48"	48-1/2" x 48-1/2"	11	58 lbs.

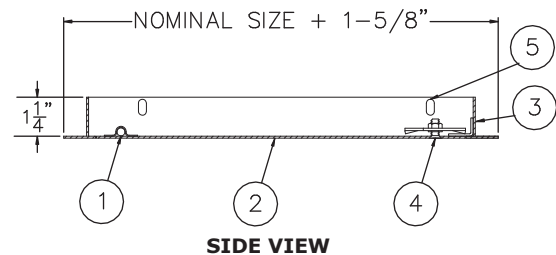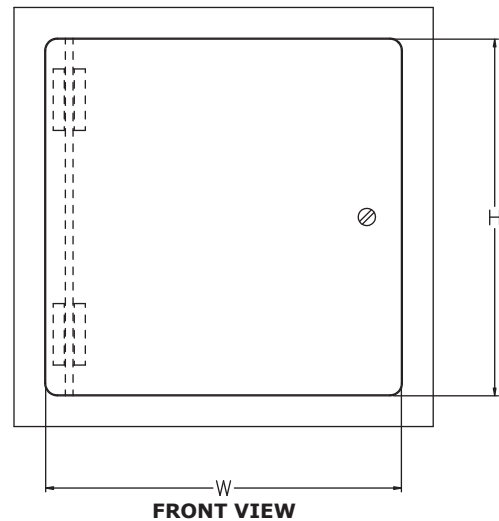

- NOTES:
1. CONCEALED PIVOTING ROD HINGE
 2. DOOR
 3. FRAME
 4. SCREWDRIVER OPERATED LATCH
 5. MOUNTING HOLES

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

DW

Revised: 08/31/18