

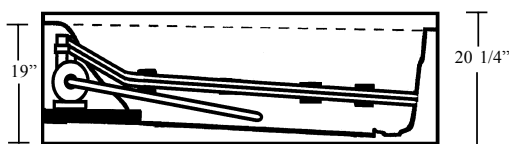


CORONADO

AQUATIC

BUILDER SELECT COLLECTION MODEL # -- SEE BELOW

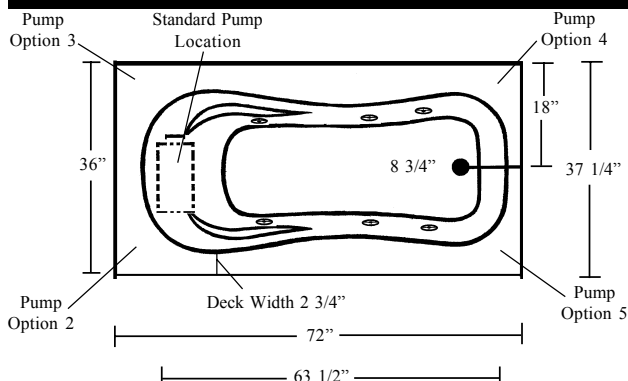


Note: Tub only model does not include an access panel unless ordered as an option.

AIIS7236LB / AIIS7236RB / AIIS7236LTOB / AIIS7236RTOB



ALSO AVAILABLE AS TUB ONLY

Rough-In Plumbing Measurements



EQUIPMENT LEGEND



SPECIFICATIONS:

General Specifications:

Tub Size	72" x 36" x 20 1/4"
	183 cm x 91 cm x 51 cm
Bathing Well	51" long
	24 1/8" wide
	17" interior depth
Shipping Weight	120 lbs. / 54 kg
Tub Weight Filled	657 lbs. / 298 kg
Tub Only Weight	113 lbs. / 51 kg
Gallons to Overflow	68 gal. / 257 L
Gallons to Operate	50 gal. / 189 L

Electrical Specifications:

Pump	3/4 HP; 5.5 AMP; 110V
Requirement	15 AMP; 110V, separate circuit required protected w/ Class A GFCI

STANDARD EQUIPMENT:

- 6 Directional Hydrotherapy Jets
- Aquatic Quality Features:
 - 3/4 HP Run-Dry Pump with Temperature Maintenance Device
 - Bath-Side On/Off Air Switch
 - 2 Arm Rests
 - Integrally Molded Tile Flange
 - Color Matched Integral Skirt with Removable Access Panels
 - Color Matched Trim and Jets (Select Colors)
 - Right or Left Hand Drain
 - Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
 - Durable, Easy to Clean, Lucite® Cast Acrylic Surface
 - Available in 8 Standard No-Charge Colors
- UL and IAPMO Listed, Factory Tested
- Limited 7 Year Warranty

OPTIONAL EQUIPMENT:

- Lift & Turn Waste and Overflow
 - Chrome, Polished Brass
 - Cable Drive Waste and Overflow
 - Chrome, Polished Brass or Color Matched (Bone, White & Biscuit Only)
 - Pillow (White, Biscuit or Black)
 - Optional Pump Location
 - Removable Access Panels (Tub Only)
 - Premium Colors
- All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.*

Fax-On-Demand Document # 1060



The manufacturer accepts a 1/4" variance. There are variations on each tub and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building should be measured from the tub; Aquatic Industries, Inc. assumes no responsibility for preparatory work.