


SensoWash® Slim SensoWash® Slim shower-toilet seat for DuraStyle* # 611200001001300 / 611200001101300

< 14 3/4" Inch >

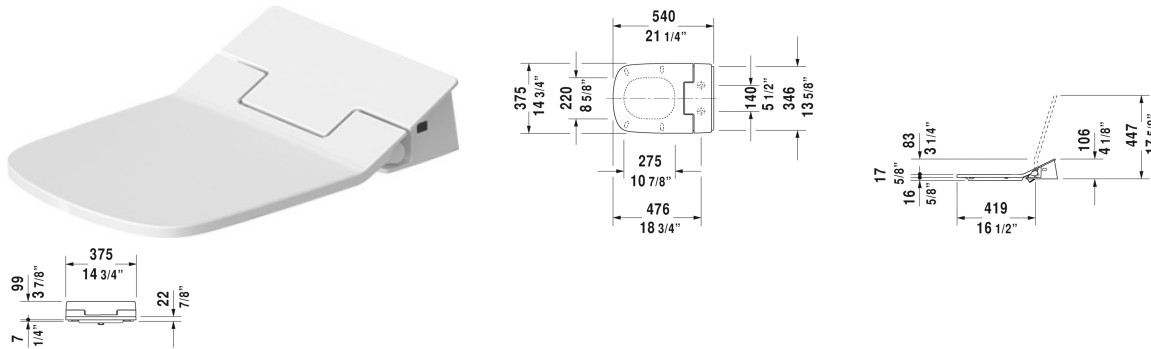

SensoWash® Slim shower-toilet seat for DuraStyle*	Dimension	Weight	Order number
Rear-, Lady- and Comfortwash, with slow close, night light, remote control included, locking function via remote control, self-cleaning wand, on / off-button, with concealed connections, automatic drainage in periods of prolonged disuse			
Colors			
00 White			
Variant			
AC 100-120V, 50-60 Hz, individual adjustment of water temperature, spray wand position and water spray intensity, seat and lid easily removable with one hand	14 3/4" x 21 1/4" Inch	12.1 lb	611200001001300
AC 100-120V, 50-60 Hz, individual adjustment of water- and seat surface temperature as well as nozzle position and jet strength, heated seat	14 3/4" x 21 1/4" Inch	12.1 lb	611200001101300
Infobox			
Install a water water softener with water hardness ≥ 2.4 mmol/l ($\geq 14^\circ$ dH or 24° fH).			
Suitable products			
One-Piece toilet for SensoWash® only in combination with SensoWash, syphonic, 12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC® listed*, WaterSense® listed, 14 5/8" x 28 3/8" Inch	14 5/8" x 28 3/8" Inch		215751
Toilet wall-mounted for SensoWash® washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, cUPC® listed*, WaterSense® listed, 14 5/8" X 24 3/8" Inch	14 5/8" X 24 3/8" Inch		253759

SensoWash® Slim SensoWash® Slim shower-toilet seat for DuraStyle* # 611200001001300 / 611200001101300

| < 14 3/4" Inch > |

Toilet close-coupled for SensoWash® (without tank), only in combination with SensoWash, washdown model, outlet for vario connector set, for horizontal and vertical outlet, length adjustable from 2 3/4" - 6 3/4", and vario connecting bend, vertical outlet from 6 3/4" - 8 5/8", connecting elements for SensoWash with concealed connections included, hardware included, cUPC® listed*, WaterSense® listed, 14 5/8" x 27 1/2" Inch	14 5/8" x 27 1/2" Inch	215659
Two-piece toilet for SensoWash® (without tank), syphonic, only in combination with SensoWash, 12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC® listed*, WaterSense® listed, 14 1/8" x 27 1/2" Inch	14 1/8" x 27 1/2" Inch	216051
Toilet wall-mounted Duravit Rimless for SensoWash® rimless, washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, cUPC® listed*, WaterSense® listed, 14 5/8" X 24 3/8" Inch	14 5/8" X 24 3/8" Inch	254259
Toilet kit One-Piece toilet for SensoWash® & SensoWash® Slim shower-toilet seat, WaterSense® listed, 14 3/4" x 28 3/8" Inch	14 3/4" x 28 3/8" Inch	D40524
Toilet kit One-Piece toilet for SensoWash® & SensoWash® Slim shower-toilet seat, WaterSense® listed, 14 3/4" x 28 3/8" Inch	14 3/4" x 28 3/8" Inch	D40526
Toilet kit Toilet bowl for SensoWash®, Tank & SensoWash® Starck shower-toilet seat, WaterSense® listed, 15 3/8" x 27 1/2" Inch	15 3/8" x 27 1/2" Inch	D40528
Toilet kit Toilet bowl for SensoWash®, Tank & SensoWash® Starck shower-toilet seat, WaterSense® listed, 15 3/8" x 27 1/2" Inch	15 3/8" x 27 1/2" Inch	D40529
Toilet kit Toilet bowl for SensoWash®, Tank & SensoWash® Starck shower-toilet seat, WaterSense® listed, 15 3/8" x 27 1/2" Inch	15 3/8" x 27 1/2" Inch	D40531
Toilet kit Toilet bowl for SensoWash®, Tank & SensoWash® Starck shower-toilet seat, WaterSense® listed, 15 3/8" x 27 1/2" Inch	15 3/8" x 27 1/2" Inch	D40532
Toilet kit One-Piece toilet for SensoWash® & SensoWash® Slim shower-toilet seat, WaterSense® listed, 14 3/4" x 28 3/8" Inch	14 3/4" x 28 3/8" Inch	D40534
Toilet kit One-Piece toilet for SensoWash® & SensoWash® Slim shower-toilet seat, WaterSense® listed, 14 3/4" x 28 3/8" Inch	14 3/4" x 28 3/8" Inch	D40535

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.