

► **Code Number**

3010500

► **Description**

Exposed Service Sink Flushometer, for use with top spud Service Sinks.

► **Flush Cycle**

Model BPW 1000-6.5 (6.5 gpf/24.6 Lpf)

► **Specifications**

Quiet, Exposed, Diaphragm Type, Chrome Plated Service Sink Flushometer with the following features:

- Metal Oscillating Non-Hold open Handle with Triple Seal Handle Packing
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap
- Spud Coupling and Flange for 1½" Top Spud
- Spud Coupling, Wall and Spud Flanges
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology
- Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance


Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► **Accessories**

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

► **Disclaimer**

All information contained within this document subject to change without notice.

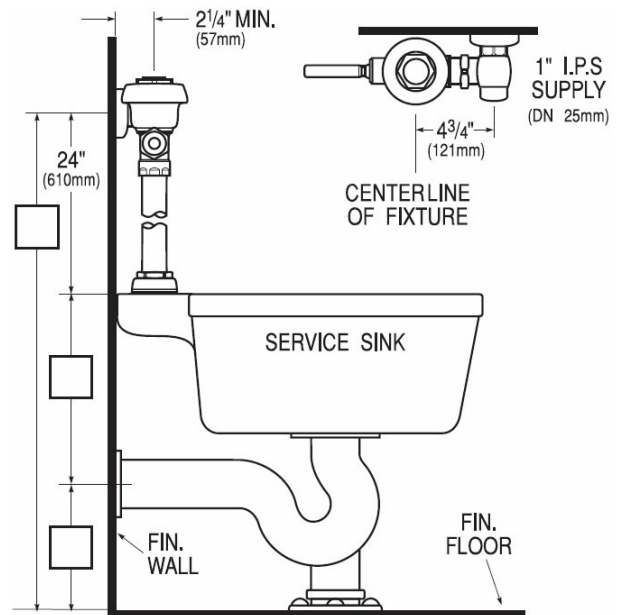

► **Compliance**



**Made In The
USA**

This space for Architect/Engineer Approval